




F-PMCG

Filtering system for PMCG HUMIDITY GENERATORS

F-PMCG filtration system is designed to work with PMCG units.

Outgoing air from PMCG is entering filter unit and after treatment, is going into the display case. Filter unit usually consists of 2 filter cartridges, activated carbon and dust filter.

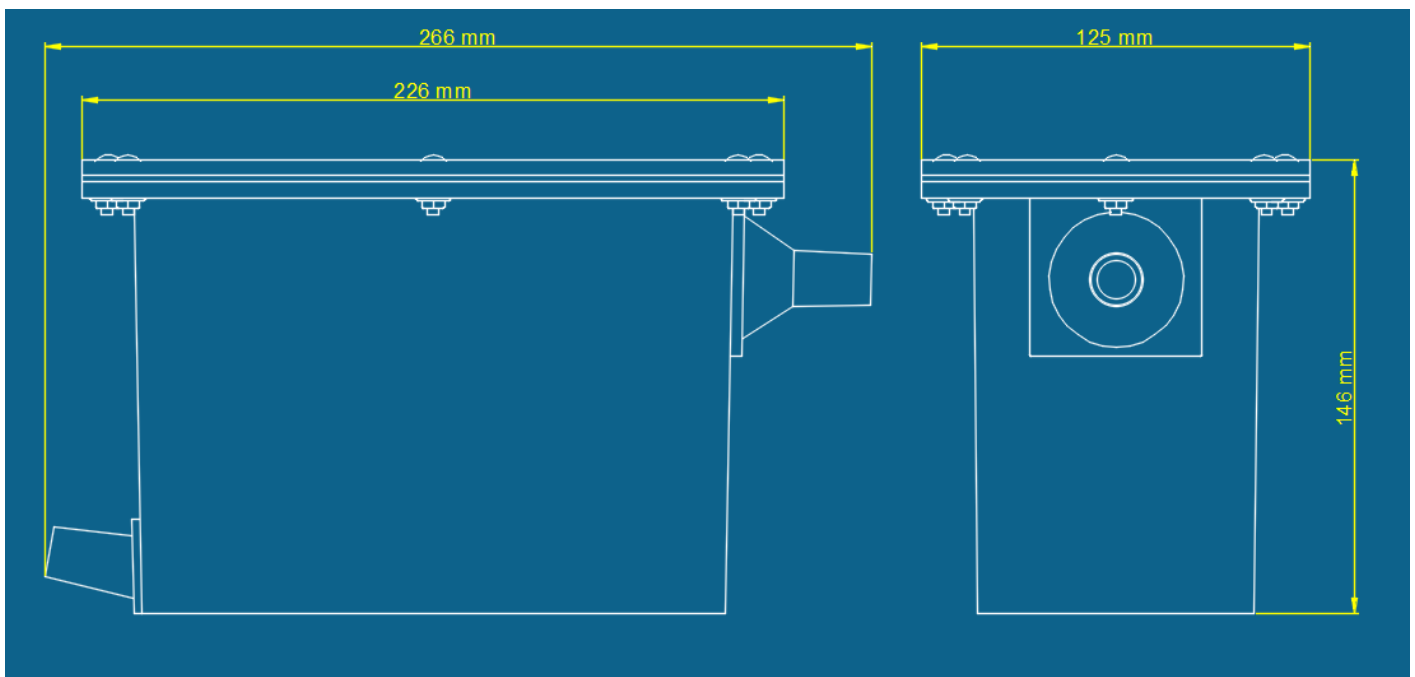

“A”

FILTER CASING

Material: Plexiglass
Weight (empty): 0.7 kg
Weight with standard cartridges:
Dimensions: as per drawing

AIR CONNECTORS
Input Side:
16 mm fitting
Output Side:
16 mm fitting with 12VDC fan.

FILTER CARTRIDGES

Typically, the filter casing consists of 2 cartridges, activated carbon and dust.

STANDARD CARTRIDGES:

F7(MERV13) particle filter for use with all configurations.
H14(Type A) particle filter for use with all configurations.
Coconut shell, granulated activated carbon.

NON STANDARD CARTRIDGES:

Impregnated with 0.01% metallic silver coconut shell activated carbon.
Impregnated with 0.01% metallic bactericide coconut shell activated carbon.
Impregnated with 0.01% metallic silver bactericide coconut shell activated carbon.
Impregnated with 0.1% metallic silver coconut shell activated carbon.
Impregnated with 0.05% metallic silver bactericide coconut shell activated carbon.

Minimum order may be required.

For adsorption detailed information, please see our download page: <http://www.preservatech.com/dwl> or scan below.



ADSORPTION